
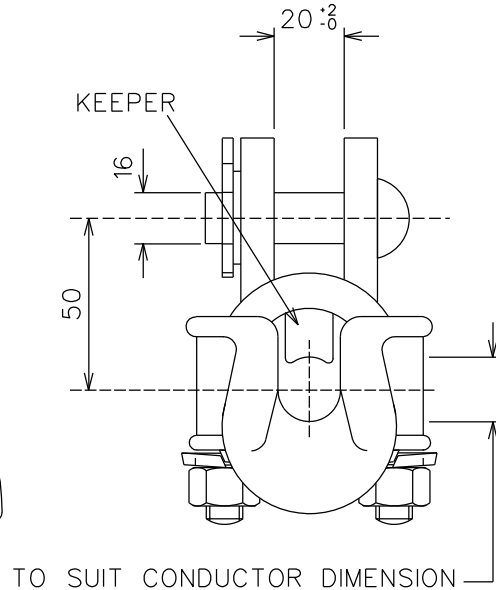


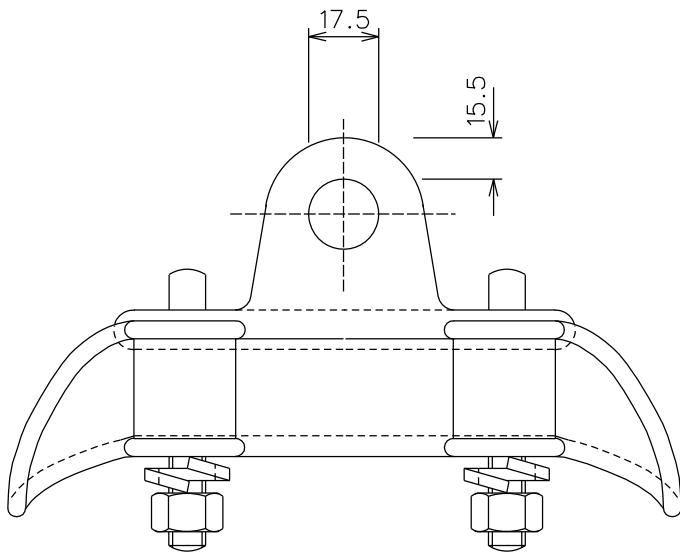

NOTE :
SKETCH NOT FOR MANUFACTURING PURPOSES

ITEM		:- CLAMP,SUSP CRADLE							
MATERIAL SPECIFICATION-		:- BS EN 1562, SANS 991, SANS 992							
CORROSION SPECIFICATION		:- SANS 121							
STANDARD SPECIFICATION		:- SANS 61284,SANS 60471							
ESKOM SPECIFICATION		:-							
TEST & CERTIFICATION REQUIREMENTS		:- TYPE TEST ACCORDING TO SANS 61284 AND DSP 34-1667							
INSPECTION		Yes	No	ESKOM RELEASE NOTE		Yes	No		
IDENTIFICATION:- INDELIBLE MANUFACTURES TRADEMARK & PART No. ON ALL ITEMS									
17	SAP NUMBER AND ESKOM LOGO CHANGED			P.A.T.	M. SHUTER	M. SHUTER	07.02.2014		
16	SUSP CRADLE 15.0-24.4 TECH. DESC. CORRECTED			P.A.T.	S. MASHABA	B. HILL	07.10.2010		
15	1 SPRING WASHER REQ. AND STD. AND ESKOM SPEC'S CHANGED AND MATERIAL GRADE CHANGED			P.A.T.	S. MASHABA	B. HILL	03.08.2009		
REV	REVISION DESCRIPTION			BY	CHKD	AUTH	DATE	REF. DWGS	
AUTH:	S.CILLIERS	DATE:	MARCH 1993	SCALE			SAP No:		
				NTS			0168534		
				CAD REF:			0402501		
CHKD:		DATE:		SERIES 3000	D-DT-3008		SET	SHEET	REV
				FILE No:			2	1	17
				3008					
DRAWN:	Z.WATSON	DATE:	14.09.1992						

SPEC SHEET

SAP MATERIAL No.:	0168534
SHORT DESCRIPTION:	CLAMP,SUSP CRADLE CON 8,0-18,0 D3008

TECH. DESCRIPTION:

CRADLE TYPE SUSPENSION CLAMP *
 BODY CAN BE MANUFACTURED FROM GALVANISED
 MALLEABLE CAST IRON OR DIE CAST ALUMINIUM *
 CONDUCTOR RANGE INCLUDING ARMOR RODS 8.0mm (3.66 STEEL WIRE)
 TO 18mm (FOX) * CLEVIS OPENING 20mm * MIN. FAILING LOAD 40kN *
 SUPPLIED COMPLETE WITH :
 M16 CLEVIS PIN AND HUMP BACK SPLIT PIN ASSEMBLY (D-DT-3167) *
 4 x M12 SPRING WASHER(D-DT-3014),
 2 x M12 U-BOLTS (SUITABLE LENGTH FOR ALL CONDUCTOR RANGES),
 4 x M12 HEX. NUTS (D-DT-3173) AND SUPPLIED WITH KEEPER *
 ESKOM DRAWING No. D-DT-3008 *

SAP MATERIAL No.:	0402501
SHORT DESCRIPTION:	CLAMP,SUSP CRADLE CON 15.0-24.4 D3008

TECH. DESCRIPTION:

CRADLE TYPE SUSPENSION CLAMP *
 BODY CAN BE MANUFACTURED FROM GALVANISED
 MALLEABLE CAST IRON OR DIE CAST ALUMINIUM *
 CONDUCTOR RANGE INCLUDING ARMOR RODS 15.0mm (FOX)
 TO 24.4mm (HARE) * CLEVIS OPENING 20mm * MINIMUM FAILING LOAD 40kN *
 SUPPLIED COMPLETE WITH :
 M16 CLEVIS PIN AND HUMP BACK SPLIT PIN ASSEMBLY (D-DT-3167) *
 4 x M12 SPRING WASHER (D-DT-3014),
 2 x M12 U-BOLTS (SUITABLE LENGTH FOR ALL CONDUCTOR RANGES),
 4 x M12 HEX. NUTS (D-DT-3173) AND SUPPLIED WITH KEEPER *
 ESKOM DRAWING No. D-DT-3008 *

17	SAP NUMBER AND ESKOM LOGO CHANGED			P.A.T.	M. SHUTER	M. SHUTER	07.02.2014				
16	SUSP CRADLE 15.0-24.4 TECH. DESC. CORRECTED			P.A.T.	S. MASHABA	B. HILL	07.10.2010				
15	1 SPRING WASHER REQ. AND STD. AND ESKOM SPEC'S CHANGED AND MATERIAL GRADE CHANGED			P.A.T.	S. MASHABA	B. HILL	03.08.2009				
REV	REVISION DESCRIPTION			BY	CHKD	AUTH	DATE	REF. DWGS			
AUTH:	S.CILLIERS	DATE:	MARCH 1993	SCALE NTS		 D-DT-3008		SAP No:			
CHKD:		DATE:		CAD REF:				0168534			
				SERIES 3000				0402501			
DRAWN:	Z.WATSON	DATE:	14.09.1992	FILE No:				SET		SHEET	
				3008		2		2		17	